



## A SECTION HY-T® BELTS: Top Width = 0.50" Thickness = 0.31"

BELT NO.	NOM. PITCH LGTH.	NOM. OUTS. LGTH.	HY-T		BELT NO.	NOM. PITCH LGTH.	NOM. OUTS. LGTH.	HY-T
			WT LB					WT LB
A20 (4L220)	21.3	22.0	.10		A66 (4L680)	67.3	68.0	.37
A21 (4L230)	22.3	23.0	.10		A67 (4L690)	68.3	69.0	.38
A22 (4L240)	23.3	24.0	.11		A68 (4L700)	69.3	70.0	.38
A23 (4L250)	24.3	25.0	.11		A69 (4L710)	70.3	71.0	.39
A24 (4L260)	25.3	26.0	.12		A70 (4L720)	71.3	72.0	.39
A25 (4L270)	26.3	27.0	.12		A71 (4L730)	72.3	73.0	.38
A26 (4L280)	27.3	28.0	.16		A72 (4L740)	73.3	74.0	.40
A27 (4L290)	28.3	29.0	.16		A73 (4L750)	74.3	75.0	.39
A28 (4L300)	29.3	30.0	.16		A74 (4L760)	75.3	76.0	.42
A29 (4L310)	30.3	31.0	.17		A75 (4L770)	76.3	77.0	.42
A30 (4L320)	31.3	32.0	.18		A76 (4L780)	77.3	78.0	.43
A31 (4L330)	32.3	33.0	.18		A77 (4L790)	78.3	79.0	.43
A32 (4L340)	33.3	34.0	.19		A78 (4L800)	79.3	80.0	.44
A33 (4L350)	34.3	35.0	.19		A79 (4L810)	80.3	81.0	.42
A34 (4L360)	35.3	36.0	.20		A80 (4L820)	81.3	82.0	.45
A35 (4L370)	36.3	37.0	.20		A81 (4L830)	82.3	83.0	.45
A36 (4L380)	37.3	38.0	.21		A82 (4L840)	83.3	84.0	.46
A37 (4L390)	38.3	39.0	.21		A83 (4L850)	84.3	85.0	.44
A38 (4L400)	39.3	40.0	.22		A84 (4L860)	85.3	86.0	.47
A39 (4L410)	40.3	41.0	.23		A85 (4L870)	86.3	87.0	.48
A40 (4L420)	41.3	42.0	.23		A86 (4L880)	87.3	88.0	.48
A41 (4L430)	42.3	43.0	.24		A87 (4L890)	88.3	89.0	.46
A42 (4L440)	43.3	44.0	.24		A88 (4L900)	89.3	90.0	.49
A43 (4L450)	44.3	45.0	.25		A89 (4L910)	90.3	91.0	.50
A44 (4L460)	45.3	46.0	.25		A90 (4L920)	91.3	92.0	.50
A45 (4L470)	46.3	47.0	.25		A91 (4L930)	92.3	93.0	.51
A46 (4L480)	47.3	48.0	.26		A92 (4L940)	93.3	94.0	.49
A47 (4L490)	48.3	49.0	.26		A93 (4L950)	94.3	95.0	.52
A48 (4L500)	49.3	50.0	.27		A94 (4L960)	95.3	96.0	.52
A49 (4L510)	50.3	51.0	.28		A95 (4L970)	96.3	97.0	.53
A50 (4L520)	51.3	52.0	.29		A96 (4L980)	97.3	98.0	.53
A51 (4L530)	52.3	53.0	.29		A97 (4L990)	98.3	99.0	.54
A52 (4L540)	53.3	54.0	.30		A98 (4L1000)	99.3	100.0	.55
A53 (4L550)	54.3	55.0	.30		A100	101.3	102.0	.56
A54 (4L560)	55.3	56.0	.29		A103	104.3	105.0	.66
A55 (4L570)	56.3	57.0	.30		A105	106.3	107.0	.58
A56 (4L580)	57.3	58.0	.32		A110	111.3	112.0	.70
A57 (4L590)	58.3	59.0	.31		A112	113.3	114.0	.62
A58 (4L600)	59.3	60.0	.33		A120	121.3	122.0	.76
A59 (4L610)	60.3	61.0	.33		A128	129.3	130.0	.86
A60 (4L620)	61.3	62.0	.34		A133	134.3	135.0	.89
A61 (4L630)	62.3	63.0	.35		A136	137.3	138.0	.91
A62 (4L640)	63.3	64.0	.35		A144	145.3	146.0	.97
A63 (4L650)	64.3	65.0	.36		A158	159.3	160.0	1.06
A64 (4L660)	65.3	66.0	.36		A173	174.3	175.0	1.16
A65 (4L670)	66.3	67.0	.37		A180	181.3	182.0	1.20

# HY-T® PLUS (CLASSICAL)

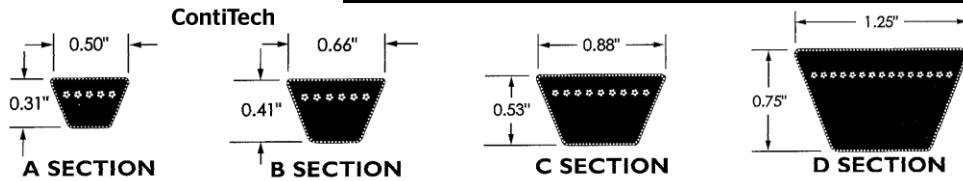

B SECTION HY-T® BELTS: Top Width = 0.66" Thickness = 0.41"								
BELT NO.	NOM. PITCH LGTH.	NOM. OUTS. LGTH.	HY-T WT LB		BELT NO.	NOM. PITCH LGTH.	NOM. OUTS. LGTH.	HY-T WT LB
B22 (5L250)	23.8	25.0	.20		B79 (5L820)	80.8	82.0	.81
B23 (5L260)	24.8	26.0	.21		B80 (5L830)	81.8	83.0	.77
B24 (5L270)	25.8	27.0	.21		B81 (5L840)	82.8	84.0	.83
B25 (5L280)	26.8	28.0	.22		B82 (5L850)	83.8	85.0	.79
B26 (5L290)	27.8	29.0	.23		B83 (5L860)	84.8	86.0	.85
B27 (5L300)	28.8	30.0	.24		B84 (5L870)	85.8	87.0	.86
B28 (5L310)	29.8	31.0	.25		B85 (5L880)	86.8	88.0	.87
B29 (5L320)	30.8	32.0	.25		B86 (5L890)	87.8	89.0	.88
B30 (5L330)	31.8	33.0	.26		B87 (5L900)	88.8	90.0	.89
B31 (5L340)	32.8	34.0	.27		B88 (5L910)	89.8	91.0	.90
B32 (5L350)	33.8	35.0	.28		B89 (5L920)	90.8	92.0	.85
B33 (5L360)	34.8	36.0	.29		B90 (5L930)	91.8	93.0	.86
B34 (5L370)	35.8	37.0	.29		B91 (5L940)	92.8	94.0	.87
B35 (5L380)	36.8	38.0	.38		B92 (5L950)	93.8	95.0	.94
B36 (5L390)	37.8	39.0	.36		B93 (5L960)	94.8	96.0	.89
B37 (5L400)	38.8	40.0	.37		B94 (5L970)	95.8	97.0	.90
B38 (5L410)	39.8	41.0	.41		B95 (5L980)	96.8	98.0	.97
B39 (5L420)	40.8	42.0	.39		B96 (5L990)	97.8	99.0	.92
B40 (5L430)	41.8	43.0	.40		B97 (5L1000)	98.8	100.0	.99
B41 (5L440)	42.8	44.0	.41		B98	99.8	101.0	.94
B42 (5L450)	43.8	45.0	.45		B99	100.8	102.0	.94
B43 (5L460)	44.8	46.0	.43		B100	101.8	103.0	1.02
B44 (5L470)	45.8	47.0	.44		B101	102.8	104.0	.97
B45 (5L480)	46.8	48.0	.48		B103	104.8	106.0	1.05
B46 (5L490)	47.8	49.0	.49		B105	106.8	108.0	1.07
B47 (5L500)	48.8	50.0	.50		B108	109.8	111.0	1.03
B48 (5L510)	49.8	51.0	.51		B111	112.8	114.0	1.13
B49 (5L520)	50.8	52.0	.48		B112	113.8	115.0	1.07
B50 (5L530)	51.8	53.0	.52		B115	116.8	118.0	1.17
B51 (5L540)	52.8	54.0	.54		B116	117.8	119.0	1.11
B52 (5L550)	53.8	55.0	.54		B118	119.8	121.0	1.21
B53 (5L560)	54.8	56.0	.55		B120	121.8	123.0	1.21
B54 (5L570)	55.8	57.0	.56		B124	125.8	127.0	1.36
B55 (5L580)	56.8	58.0	.57		B128	129.8	131.0	1.29
B56 (5L590)	57.8	59.0	.58		B133	134.8	136.0	1.46
B57 (5L600)	58.8	60.0	.59		B136	137.8	139.0	1.49
B58 (5L610)	59.8	61.0	.60		B140	141.8	143.0	1.53
B59 (5L620)	60.8	62.0	.61		B144	145.8	147.0	1.57
B60 (5L630)	61.8	63.0	.62		B148	149.8	151.0	1.62
B61 (5L640)	62.8	64.0	.63		B150	151.8	153.0	1.64
B62 (5L650)	63.8	65.0	.64		B154	155.8	157.0	1.68
B63 (5L660)	64.8	66.0	.65		B158	159.8	161.0	1.72
B64 (5L670)	65.8	67.0	.66		B162	163.8	165.0	1.77
B65 (5L680)	66.8	68.0	.67		B173	174.8	176.0	1.88
B66 (5L690)	67.8	69.0	.68		B180	181.8	183.0	1.96
B67 (5L700)	68.8	70.0	.65		B190	191.8	193.0	2.06
B68 (5L710)	69.8	71.0	.70		B195	196.8	198.0	2.12
B69 (5L720)	70.8	72.0	.71		B205	206.8	208.0	2.22
B70 (5L730)	71.8	73.0	.72		B210	211.8	213.0	2.28
B71 (5L740)	72.8	74.0	.69		B225	226.8	228.0	2.42
B72 (5L750)	73.8	75.0	.74		B240	241.8	243.0	2.58
B73 (5L760)	74.8	76.0	.75		B255	256.8	258.0	2.74
B74 (5L770)	75.8	77.0	.71		B270	271.8	273.0	2.90
B75 (5L780)	76.8	78.0	.72		B285	286.8	288.0	3.06
B76 (5L790)	77.8	79.0	.73		B300	301.8	303.0	3.22
B77 (5L800)	78.8	80.0	.79		B315	316.8	318.0	3.27
B78 (5L810)	79.8	81.0	.80					

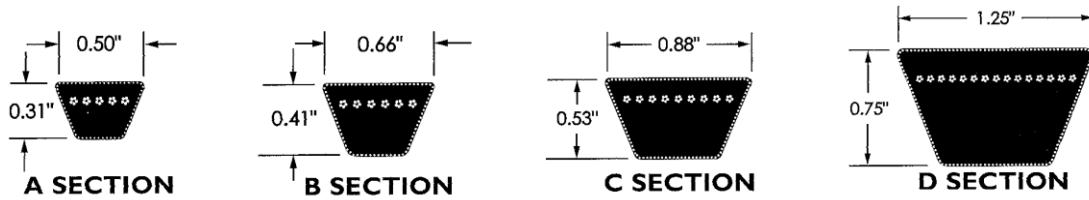

C SECTION HY-T® BELTS: Top Width = 0.88" Thickness = 0.53"											
BELT NO.	NOM. PITCH LGTH.	NOM. OUTS. LGTH.	HY-T WT LB	BELT NO.	NOM. PITCH LGTH.	NOM. OUTS. LGTH.	HY-T WT LB	BELT NO.	NOM. PITCH LGTH.	NOM. OUTS. LGTH.	HY-T WT LB
C51	53.9	55.0	.92	C101	103.9	105.0	1.77	C180	182.9	184.0	3.42
C55	57.9	59.0	.99	C105	107.9	109.0	1.83	C190	192.9	194.0	3.61
C60	62.9	64.0	1.07	C106	108.9	110.0	1.85	C195	197.9	199.0	3.70
C68	70.9	72.0	1.21	C108	110.9	112.0	1.88	C210	212.9	214.0	4.04
C71	73.9	75.0	1.27	C109	111.9	113.0	1.90	C225	225.9	227.0	4.29
C72	74.9	76.0	1.29	C112	114.9	116.0	1.95	C240	240.9	242.0	4.57
C75	77.9	79.0	1.32	C115	117.9	119.0	2.00	C255	255.9	257.0	4.85
C78	80.9	82.0	1.38	C120	122.9	124.0	2.08	C270	270.9	272.0	5.13
C81	83.9	85.0	1.43	C124	126.9	128.0	2.43	C285	285.9	287.0	5.42
C85	87.9	89.0	1.50	C128	130.9	132.0	2.21	C300	300.9	302.0	5.70
C90	92.9	94.0	1.58	C136	138.9	140.0	2.61	C315	315.9	317.0	6.00
C93	95.9	97.0	1.64	C144	146.9	148.0	2.76	C330	330.9	332.0	6.29
C96	98.9	100.0	1.68	C150	152.9	154.0	2.87	C345	345.9	347.0	6.57
C97	99.9	101.0	1.69	C158	160.9	162.0	3.01	C360	360.9	362.0	6.85
C99	101.9	103.0	1.74	C162	164.9	166.0	3.09	C390	390.9	392.0	7.42
C100	102.9	104.0	1.75	C173	175.9	177.0	3.29	C420	420.9	422.0	7.98

D SECTION HY-T® BELTS: Top Width = 1.25" Thickness = 0.75"											
BELT NO.	NOM. PITCH LGTH.	NOM. OUTS. LGTH.	HY-T WT LB	BELT NO.	NOM. PITCH LGTH.	NOM. OUTS. LGTH.	HY-T WT LB	BELT NO.	NOM. PITCH LGTH.	NOM. OUTS. LGTH.	HY-T WT LB
D112	115.3	117.0	4.19	D210	213.3	215.0	8.45	D345	345.8	347.5	13.69
D120	123.3	125.0	4.94	D225	225.8	227.5	8.96	D360	360.8	362.5	14.28
D128	131.3	133.0	5.26	D240	240.8	242.5	9.54	D390	390.8	392.5	15.45
D144	147.3	149.0	5.88	D255	255.8	257.5	10.13	D420	420.8	422.5	16.63
D158	161.3	163.0	6.43	D270	270.8	272.5	10.71	D450	450.8	452.5	17.80
D162	165.3	167.0	6.58	D285	285.8	287.5	11.30	D480	480.8	482.5	18.98
D173	176.3	178.0	7.01	D300	300.8	302.5	11.88	D540	540.8	542.5	21.33
D180	183.3	185.0	7.28	D315	315.8	317.5	12.52				
D195	198.3	200.0	7.87	D330	330.8	332.5	13.10				

E SECTION HY-T® BELTS: Top Width = 1.50" Thickness = 0.91"											
BELT NO.	NOM. PITCH LGTH.	NOM. OUTS. LGTH.	HY-T WT LB	BELT NO.	NOM. PITCH LGTH.	NOM. OUTS. LGTH.	HY-T WT LB	BELT NO.	NOM. PITCH LGTH.	NOM. OUTS. LGTH.	HY-T WT LB
E180	184.5	187.5	9.88	E300	301.0	304.0	16.16	E420	421.0	424.0	23.08
E195	199.5	202.5	10.79	E330	331.0	334.0	18.19	E480	481.0	484.0	26.34
E210	214.5	217.5	11.59	E360	361.0	364.0	19.82	E540	541.0	544.0	30.30
E240	241.5	244.0	12.99	E390	391.0	394.0	21.45	E600	601.0	604.0	33.70
E270	271.5	274.0	14.57								

NOTE: "E" SECTION BELTS ARE FOR REPLACEMENT ON EXISTING DRIVES ONLY.  
NEVER USE FOR NEW DRIVE DESIGN.